


Set Collars


# DRSS

Order method

DRSS-10×12  
Product No. d B



DRSS-Slit type

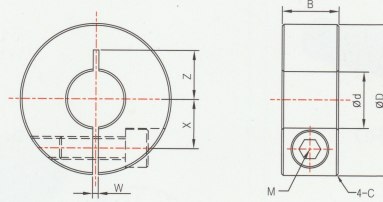

Product NO.	Material	Surface Treatment
<b>DRSS</b>	Aluminum alloy with high stiffness	White Alumite Process
<b>DRSS-B</b>	Aluminum alloy with high stiffness	Black Alumite Process
<b>DRSS-S</b>	S45C	Black Phosphate Coating
<b>DRSS-N</b>	S45C	Electroless Nickel Plating
<b>DRSS-SUS</b>	SUS304	

Product NO.	Dimension(mm)						Tightening Screw
	d	D	B	W	X	Z	M
DRSS	4	18	8	1	5	3.5	M3
	5	20	8	1	6	6	M3
		20	10	1	6	6	M4
DRSS-B	6	20	8	1	6	6.5	M3
		20	10	1	6	6	M4
DRSS-S	8	25	10	1.5	8	9	M4
		30	15	1.5	9	10	M6
DRSS-N	10	30	12	1.5	9	10	M5
		35	15	1.5	10	12	M6
DRSS-SUS	12	35	15	1.5	11	12	M6
	13	35	15	1.5	11.5	12	M6
	15	40	15	1.5	13	13	M6
	16	40	15	1.5	13	13	M6
	17	40	15	1.5	13	13	M6
	18	45	15	1.5	15	15	M6
	20	45	15	1.5	15	15	M6
	25	50	15	1.5	18	18	M6
	30	55	15	1.5	20	18	M6
	35	60	15	2	23	21	M6
	40	70	18	2	26	23	M8
	50	85	22	3	32	28	M10